Security - AV Sender, Day/Night & Wireless Camera

VARIFOCAL 36 IR LED COLOR DOME CAMERA
- 1/3" SONY SUPER HAD CCD Image Sensor
- 0.0 Lux (IR LED ON) • 36 IR LED
- Resolution: 480 TVLines
- DC12V • 4-9mm Imported Zoom Lens
- IR Distance: 66~98 ft. • CS Mount

FVC-889A-HBV89 36 IR LED Color DOME Camera



COLOR
480
TV Line
0.0 LUX
DC12V
Power Adapter
Sold Separately

Outdoor Wireless IR Color CCD Camera

2.4 GHz Outdoor Wireless IR Color CCD Camera
- RF Transmission Range: 5dBi Omni Directional Antenna 1.5KM,14dBi Omni Directional Antenna 12KM
- Use the 2.4GHz band without the hassle messy cable • Antennal connector: SMA Receptacle
- Weather resistant camera for indoor or undercover outdoor use
- 0 Lux with IR • IR-Distance: 98 ft.
- Transmit Power: 2 WATT • RF Impedance: 50 OHM
- Auto Gain Control, 3.6mm Lens, 0.45 Gamma Correction, 48dB S/N Ratio
- Pick-up Device: 1/3" SHARP CCD image sensor
- Picture Elements: NTSC: 512x492, PAL: 512x582
- Horizontal Resolution: 380 TVL • Sensitivity: 0 Lux (IR On)
- Electronic Shutter: Auto, Rang: 1/60(1/50)~1/100,000 sec
- 1Vp-p, 75Ohms Video output, IP66 Water Resistant
- AC 110V or AC 230V Power supply

KW-2225


COLOR
380
TV Line
0 LUX



Long Distance!! (KW-2225 can be used with KW-3206 or KW-7302R)

Wireless Multi-Receiver

2.4GHz Wireless 4CH Multi-Receiver
- 4 omni-directional antennas, minimum interference
- 4Ch Synchronal Receiver • Effective range: 100m at open site
- Connect to DVR or Video Quad • PLL Design
- Modern Design • Wide band FM demodulation
- For 2.4 GHz Wireless Camera
- Input Signal level range: -80dBm ~ -30dBm
- Antenna Connector: SMA jack
- RF Level control VR: +15 ~ -30dB
- Noise Figure: 3dB • Output Port: BNC
- Video output: 1Vp-p@75Ω
- Power Connector(DC Jack) 6pin mini DIN jack
- Power Supply: DC 5V, 2A & DC 12V, 2A

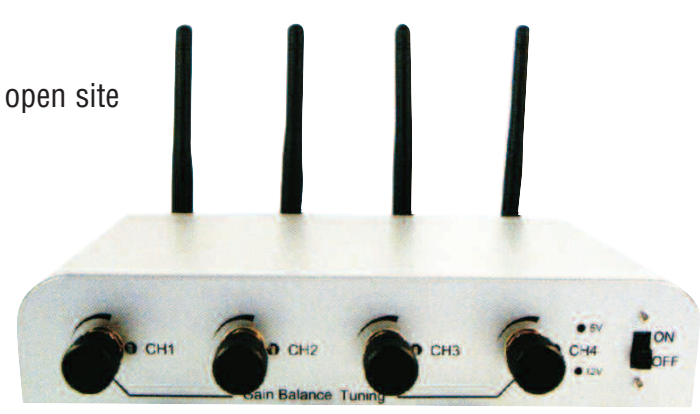

KW-3206

AV Sender

2.4GHz 8CH Wireless Medium AV Transmitter/Receiver

Transmitter
- High performance
- 2.4GHz Video/Audio Transmitter/Receiver
- 8 Channel Switchable
- 5dBi High Gain Omni Antenna
- ***Interference-free Effectively***


SPEC:
- Video / Audio Input : Composite 1Vp-p 75Ohm / 1 Vp-p
- FM Modulation Type • S/N Ration 45dB
- Output Power: 2 Watt
- Output impedance: 50 Ohm SMA Connector
- Transmission Rang: 800M
- Power Supply: DC12V/2A

KW-7305B

Receiver
- Input signal level range: -85 ~ -10dBmVideo
- Output signal level: 1Vp-p, typ
- Frequency: +/-5dB, max, 50Hz~5.5MHz
- S/N Ratio: 40dB, min
- Output Frequency: 50Hz~20KHz

Audio:
- Output signal level: 3Vp-p, typ
- Audio Frequency: 50Hz ~ 15KHz
- S/N Ratio: 50dB, min

KW-7302R



2.4GHz Wireless transmitter and receiver system with control
- Its IR far-end inverted remote control function allows user to use the IR remote control of a VCD installed at the transmitting end(such as sitting- room) to control playing of the VCD at the receiving end (such as bedroom)
- Circular-polarized directional antennas provide high quality signal transmission over long distance.
- Frequency Modulation(FM)ensures clear image and sound quality.
- 2.4GHz eliminates interference superior to other wireless devices
- It transmits from any audio/video source signals to TV, Monitor, or VCR by an A/V cable or a coaxial cable.
- 4 Channels selection • L/R dual-track stereo transmission

PIBD-241



Wireless Camera



- Simple to Use - Just plug in the power, no other cabling required.
- Color wireless surveillance system, accessible up to 8 camera simultaneously
- Good for indoor or outdoor use (transmission range up to 200 meters)
- 10mW (dipole antenna inside) 100mW (directional-adjustable patch antenna)
- CCD

WRCAM-1502-10 10mA (dipole)
WRCAM-1502-10-1 Camera only

WIRELESS CAMERA KIT includes
a. 2.4GHz Wireless Camera
b. Onmi-directional Bracket
c. Power Adapter x 2 (6VDC, 9VDC)
d. 2.4 Ghz A/V receiver with patch-antenna
e. Audio/Video Connecting Cable
f. IR remote controller
g. User's manual

- 2:1 interlace scanning system wireless camera
- 380TV Lines on the resolution
- Internal Synchronize
- 3 Lux minimum Illumination

AGC: On(preset); ELC: On(preset); ATW(preset)

Wireless Outdoor Color Camera System
- Built-in 2.4GHz RF Modules
- Transmitting Range: 100m/300ft
- 3 / 4 Channels Auto Switching Feature
- Camera in Sturdy Aluminum Structure
- CCD

WR-CCD-325CW Outdoor wireless camera system



Wireless Micro Coin-Size Color Camera Kit
- Coin-size camera (2.6x2.6x2.7cm) with built-in microphone
- Camera in silver aluminum housing and 4 channels dip switch
- Package include 9V battery pack connector (battery not included)
- The only coin-size camera with 4 channels switch function in surveillance market
- Device can connect to TV for displaying or to DVR/VCR for recording.
- CCD

PIBD-243A



with Tripod & Mounting Bracket Kit
Send Audio & Video Signal Wirelessly
PI-MVW-9



2.4GHz Wireless Video Camera
- The receiver can be connected to TV set or monitor.
- Operating frequency of ISM band 2.4-2.4835GHz on 4 Ch.
- Range up to 150 feet
- CMOS

VOC-9W



PI-MVW-9

2.4GHz Wireless Miniature Monitoring System
- Color Advanced CMOS Module
- 3 / 4 Channels Auto Switching Feature
- Camera with Rechargeable NI-MH Battery
- Wireless Camera in Super MINI Dimension (4" x 0.8" x 0.8")
- Packing including A/V cable & Camera bracket
- CMOS

WR-CCD-620 Wireless Monitoring System



Day/Night Wireless Camera

2.4GHz Color Wireless Observation System
- Color Advanced CMOS Module
- 3 / 4 Channels Auto Switching Feature
- Wireless Camera with 6mm Lens & Condensed Mic.
- Camera with Battery Compartment and Build-in LED Light
- Packing Including A/V Cable
- CMOS

WR-CCD-725 Wireless Monitoring System



2.4GHz Color Wireless Compact Camera Kit
- Color Advanced CMOS Module
- Stylish Compact Size (100x 60x 40mm)
- 3 / 4 Channels Auto Switching feature
- Wireless Camera with 6.0 mm Lens & Condensed Mic.
- Camera with Build-in LED Lights
- Packing Including A/V Cable
- CMOS

WR-CCD-735 Wireless Monitoring System



Ultra Mini Wireless Camera

The Camera is about the size of 9v battery. Perfect to place anywhere at home for monitoring nanny & kids

10mW ultra-mini color wireless camera (pinhole)
- Frequency: 2.4GHz / **Channel 1**
- Size: **22x22x24mm**
- Resolution ratio: 380 lines • Illumination: 1.5 lux
- Output standard: PAL/NTSC
- Transmission distance: 80-150m

Includes battery and Cable, wireless camera, receiver, power adapters for camera & receiver
- CCD

WRCAM-811 Ultra-mini wireless camera kit



WRCAM-811

2.4GHz Wireless Weatherproof Color Camera and Receiver System Kit
- Camera with IR LED for night vision (IR activated automatically) • Built-in 2.4GHz RF modules
- Package includes a bracket for easy installation • IP44 Weatherproof camera with microphone
- Good for real time monitoring or connection to DVR/VCR for recording. • 3 or 4 channels option
- Camera in stylish aluminum sunshield structure and IP44 weather-proof housing
- Camera with built-in microphone and 11 IR LED for night vision (auto IR activated)
- Device can connect to TV for displaying or to DVR/VCR for recording.
- Transmitting range: 100m/300ft • F.C.C.
- Receiver with auto switching mode
- Camera in sturdy aluminum structure

Camera:
- 1/3" CMOS, 330TVL, 0 Lux, 11IR LED
- NTSC/PAL, Power supply 9V/300mA Adapter
- CMOS

Receiver:
- 2.4~2.4835 MHz Frequency
- Power supply: 12V DC/200mA Adapter

PIBD-243B



Call For Quantity Pricing!